



Toll Free: 87 PERMATEX
(877-376-2839)

10 Columbus Blvd., Hartford,
Connecticut 06106

6875 Parkland Boulevard, Solon
Ohio 44139

Technical Data Sheet

Permatex® Tune-Up Kit

AAM Revised 11/02

PRODUCT DESCRIPTION

S.I.N.: 834-300

Permatex® TUNE-UP KIT is an easy to use, two part kit containing both Dielectric Tune-Up Grease and Anti-Seize Lubricant. Dielectric Tune-Up Grease protects spark plug boots and electrical connections from corrosion, while extending the life of rotor caps. Anti-Seize Lubricant is used on spark plugs before installation to prevent thread damage and allow for easy removal of spark plugs.

PRODUCT BENEFITS

- Protects electrical connections
- Prevents thread damage

TYPICAL APPLICATIONS

- Electrical connections
- Spark plug boots
- Rotor caps
- Battery terminals
- Spark plug threads
- Headlight and rear light sockets

DIRECTIONS FOR USE

Anti-Seize Directions

1. Apply a thin coat to spark plug threads. DO NOT foul electrodes.


Dielectric Tune-Up Grease Directions

Spark Plug Boots

1. Be sure ignition system is off.
2. Remove heavy grease with a clean cloth.
3. Coat inside of spark plug boot and ceramic portion of spark plug with a thin layer of Dielectric Grease.
4. Snap boot onto plug, making sure fit is tight.

Connectors and Battery Terminals

1. Make sure ignition system is off.
2. Clean surface with Permatex® Battery Cleaner.
3. Coat both parts of terminal contact with Dielectric Grease.
4. Reassemble, maintaining metal-to-metal contact.

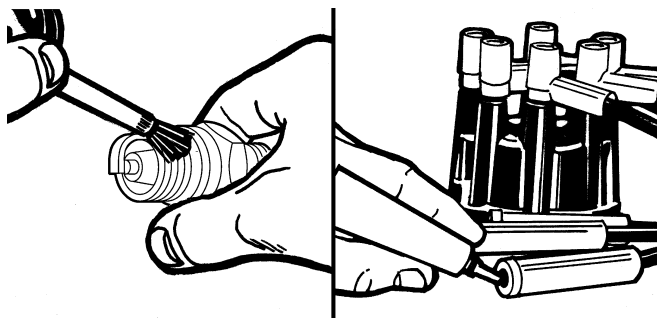

For Cleanup

1. Clean hands with a dry cloth or Permatex® brand hand cleaners.

PROPERTIES OF UNCURED MATERIAL

Product Name	Product #	Container Size
Permatex® Anti-Seize Lubricant	133AR	1 oz. tube
	133K	8 oz. brush-top
	133MA	12 oz. aerosol can
Permatex® Dielectric Tune-Up grease	67VR	.33 oz. tube
	22058	3 oz. tube

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
26984	.33 oz. tube & .24 oz. pouch, carded

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° to 28°C (46° to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.